



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : E21B 19/086	A2	(11) International Publication Number: WO 00/52297 (43) International Publication Date: 8 September 2000 (08.09.00)
(21) International Application Number: PCT/US00/05752 (22) International Filing Date: 3 March 2000 (03.03.00) (30) Priority Data: 60/122,915 5 March 1999 (05.03.99) US (71) Applicant: VARCO INTERNATIONAL, INC. [US/US]; P.O. Box 6626, Orange, CA 92868 (US). (72) Inventors: JUHASZ, Daniel; 5351 Duncannon Avenue, Westminster, CA 92683 (US). BOYADJIEFF, George; 18772 Colony Circle, Bell Park, CA 92861 (US). EIDEM, Brian, L.; 19316 Demeter Avenue, Cerritos, CA 90703 (US). VAN RIJZINGEN, Hans; Nijverheidsweg 45, NL-4879 AP Etten-Leur (NL). (74) Agent: GREEN, Robert, A.; Christie, Parker & Hale, LLP, P.O. Box 7068, Pasadena, CA 91109-7068 (US).		(81) Designated States: CA, NO, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>Without international search report and to be republished upon receipt of that report.</i>
(54) Title: PIPE RUNNING TOOL (57) Abstract <p>A pipe running tool for use in an oil drilling system and the like comprises a lower drive shaft adapted to engage a drive shaft of a top drive assembly for rotation therewith. The pipe running tool further includes a lower pipe engagement assembly which is driven to rotate by the lower drive shaft, and is designed to releasably engage a pipe segment in such a manner to substantially prevent relative rotation between the two. Thus, when the lower pipe engagement assembly is actuated to securely hold a pipe segment, the top drive assembly may be actuated to rotate the top drive output shaft, which causes the lower drive shaft and lower pipe engagement assembly to rotate, which in turn rotates the pipe segment.</p> <div data-bbox="933 1144 1372 1942" data-label="Image"> </div>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

PIPE RUNNING TOOL

CROSS-REFERENCE TO RELATED APPLICATION(S)

This application is based on provisional patent application serial number 60/122,915 filed March 5, 1999.

BACKGROUND OF THE INVENTION

Field of the Invention

This invention relates to well drilling operations and, more particularly, to a device for assisting in the assembly of pipe strings, such as casing strings, drill strings and the like.

Description of the Related Art

The drilling of oil wells involves assembling drill strings and casing strings, each of which comprises a plurality of elongated, heavy pipe segments extending downwardly from an oil drilling rig into a hole. The drill string consists of a number of sections of pipe which are threadedly engaged together, with the lowest segment (i.e., the one extending the furthest into the hole) carrying a drill bit at its lower end. Typically, the casing string is provided around the drill string to line the well bore after drilling the hole and ensure the integrity of the hole. The casing string also consists of a plurality of pipe segments which are threadedly coupled together and formed with through passages sized to receive the drill string and/or other pipe strings.

The conventional manner in which plural casing segments are coupled together to form a casing string is a labor-intensive method involving the use of a "stabber" and casing tongs. The stabber is manually controlled to insert a segment of casing into the upper end of the existing casing string, and the tongs are designed to engage and rotate the segment to threadedly connect it to the casing string. While such a method is effective, it is cumbersome and relatively inefficient because the procedure is done manually. In addition, the casing tongs require a casing crew to properly engage the segment of casing and to couple the segment to the casing string. Thus, such a method is relatively labor-intensive and therefore costly. Furthermore, using casing tongs requires the setting up of scaffolding or other like structures, and is therefore inefficient.

Others have proposed a casing running tool for assembling casing strings which utilizes a conventional top drive assembly. The tool includes a pivotable manipulator which is designed to engage a pipe segment and raise the pipe segment up into a power assist spider, which relies on gravity to hold the pipe segment. The spider is coupled to the top drive and may be rotated by it. Thus, the pipe segment may be brought into contact with a casing string and the top drive activated to rotate the casing segment and threadedly engage it with the casing string.

While such a system provides benefits over the more conventional systems used to assemble casing strings, such a system suffers from shortcomings. One such shortcoming is that the casing segment may not be sufficiently engaged by the power assist spider to properly

1 connect the casing segment with the casing string. In addition, the system fails to provide any means for effectively controlling the load applied to the threads at the bottom of the casing segment. Without the ability to control the load on the threads, cross-threading may occur, resulting in stripped threads and a useless casing segment.

5 Accordingly, it will be apparent to those skilled in the art that there continues to be a need for a device for use in a drilling system which utilizes an existing top drive assembly to efficiently assemble casing and/or drill strings, and which positively engages a pipe segment to ensure proper coupling of the pipe segment to a pipe string. The present invention addresses these needs and others.

10 SUMMARY OF THE INVENTION

Briefly, and in general terms, the present invention is directed to a pipe running tool for use in drilling systems and the like to assemble casing and/or drill strings. The pipe running tool is coupled to an existing top drive assembly which is used to rotate a drill string, and includes
15 a powered elevator that is powered into an engaged position to securely engage a pipe segment, for example, a casing segment. Because the elevator is powered into the engaged position, the pipe segment may be properly coupled to an existing pipe string using the top drive assembly.

The system of the present invention in one illustrative embodiment is directed to a pipe running tool mountable on a rig and including: a top drive assembly adapted to be connected to
20 the rig for vertical displacement of the top drive assembly relative to the rig, the top drive assembly including a drive shaft, the top drive assembly being operative to rotate the drive shaft; and a lower pipe engagement assembly including a central passageway sized for receipt of the pipe segment, the lower pipe engagement assembly including a powered engagement device that is powered to an engaged position to securely and releasably grasp the pipe segment, the lower
25 pipe engagement assembly being in communication with the drive shaft, whereby actuation of the top drive assembly causes the lower pipe engagement assembly to rotate.

In another illustrative embodiment, the present invention is directed to a method of assembling a pipe string, including the steps of: actuating a lower pipe engagement assembly to releasably engage a pipe segment; lowering a top drive assembly to bring the pipe segment into
30 contact with a pipe string; monitoring the load on the pipe string; actuating a load compensator to raise the pipe segment a selected distance relative to the pipe string, if the load on the pipe string exceeds a predetermined threshold value; and actuating the top drive assembly to rotate the pipe segment to threadedly engage the pipe segment and pipe string.

Other features and advantages of the present invention will become apparent from the
35 following detailed description, taken in conjunction with the accompanying drawings which illustrate, by way of example, the features of the present invention.

DESCRIPTION OF THE DRAWINGS

1 FIGURE 1 is an elevated side view of a drilling rig incorporating a pipe running tool according to one illustrative embodiment of the present invention;

FIGURE 2 is a side view, in enlarged scale, of the pipe running tool of FIG. 1;

FIGURE 3 is a cross-sectional view taken along the line 3-3 of FIG. 2;

5 FIGURE 4 is a cross-sectional view taken along the line 4-4 of FIG. 2;

FIGURE 5A is a cross-sectional view taken along the line 5-5 of FIG. 4 and showing a spider/elelevator in a disengaged position;

FIGURE 5B is a cross-sectional view similar to FIG. 5A and showing the spider/elelevator in an engaged position;

10 FIGURE 6 is a block diagram of components included in one illustrative embodiment of the invention; and

FIGURE 7 is a side view of another illustrative embodiment of the invention.

DETAILED DESCRIPTION OF THE INVENTION

15 In the following detailed description, like reference numerals will be used to refer to like or corresponding elements in the different figures of the drawings. Referring now to FIGS. 1 and 2, there is shown a pipe running tool 10 depicting one illustrative embodiment of the present invention, which is designed for use in assembling pipe strings, such as drill strings, casing strings, and the like. The pipe running tool 10 comprises, generally, a frame assembly 12, a
20 rotatable shaft 14, and a lower pipe engagement assembly 16 that is coupled to the rotatable shaft for rotation therewith. The pipe engagement assembly is designed for selective engagement of a pipe segment 11 (FIGS. 1, 2, and 5A) to substantially prevent relative rotation between the pipe segment and the pipe engagement assembly. The rotatable shaft 14 is designed for coupling with a top drive output shaft from an existing top drive, such that the top drive, which is normally used
25 to rotate a drill string to drill a well hole, may be used to assemble a pipe string, for example, a casing string or a drill string, as is described in greater detail below.

The pipe running tool 10 is designed for use, for example, in a well drilling rig 18. A suitable example of such a rig is disclosed in U.S. Patent Number 4,765,401 to Boyadjieff, which is expressly incorporated herein by reference as if fully set forth herein. As shown in FIG. 1, the
30 rig includes a frame 20 and a pair of guide rails 22 along which a top drive assembly, generally designated 24, may ride for vertical movement relative to the rig. The top drive assembly is preferably a conventional top drive used to rotate a drill string to drill a well hole, as is described in U.S. Patent Number 4,605,077 to Boyadjieff, which is expressly incorporated herein by reference. The top drive assembly includes a drive motor 26 and a top drive output shaft 28
35 extending downwardly from the drive motor, with the drive motor being operative to rotate the drive shaft, as is conventional in the art. The rig defines a drill floor 30 having a central opening 32 through which a drill string and/or casing string 34 is extended downwardly into a well hole.

The rig 18 also includes a flush-mounted spider 36 that is configured to releasably engage

1 the drill string and/or casing string 34 and support the weight thereof as it extends downwardly
from the spider into the well hole. As is well known in the art, the spider includes a generally
cylindrical housing which defines a central passageway through which the pipe string may pass.
The spider includes a plurality of slips which are located within the housing and are selectively
5 displaceable between disengaged and engaged positions, with the slips being driven radially
inwardly to the respective engaged positions to tightly engage the pipe segment and thereby
prevent relative movement or rotation of the pipe segment and the spider housing. The slips are
preferably driven between the disengaged and engaged positions by means of a hydraulic or
pneumatic system, but may be driven by any other suitable means.

10 Referring primarily to FIG. 2, the pipe running tool 10 includes the frame assembly 12,
which comprises a pair of links 40 extending downwardly from a link adapter 42. The link
adapter defines a central opening 44 through which the top drive output shaft 28 may pass.
Mounted to the link adapter on diametrically opposed sides of the central opening are respective
upwardly extending, tubular members 46 (FIG. 1), which are spaced a predetermined distance
15 apart to allow the top drive output shaft 28 to pass therebetween. The respective tubular
members connect at their upper ends to a rotating head 48, which is connected to the top drive
assembly 24 for movement therewith. The rotating head defines a central opening (not shown)
through which the top drive output shaft may pass, and also includes a bearing (not shown) which
engages the upper ends of the tubular members and permits the tubular members to rotate relative
20 to the rotating head body, as is described in greater detail below.

The top drive output shaft 28 terminates at its lower end in an internally splined coupler
52 which is engaged to an upper end of the lower drive shaft 14 (not shown) which is formed to
complement the splined coupler for rotation therewith. Thus, when the top drive output shaft 28
is rotated by the top drive motor 26, the lower drive shaft 14 is also rotated. It will be understood
25 that any suitable interface may be used to securely engage the top and lower drive shafts together.

In one illustrative embodiment, the lower drive shaft 14 is connected to a conventional
pipe handler, generally designated 56, which may be engaged by a suitable torque wrench (not
shown) to rotate the lower drive shaft and thereby make and break connections that require very
high torque, as is well known in the art.

30 The lower drive shaft 14 is also formed with a splined segment 58, which is slidably
received in an elongated, splined bushing 60 which serves as an extension of the lower drive
shaft. The drive shaft and bushing are splined to provide for vertical movement of the shaft
relative to the bushing, as is described in greater detail below. It will be understood that the
splined interface causes the bushing to rotate when the lower drive shaft rotates.

35 The pipe running tool 10 further includes the lower pipe engagement assembly 16, which
in one embodiment comprises a torque transfer sleeve 62 which is securely connected to the
lower end of the bushing 60 for rotation therewith. The torque transfer sleeve is generally
annular and includes a pair of upwardly projecting arms 64 on diametrically opposed sides of the

1 sleeve. The arms are formed with respective horizontal through passageways (not shown) into
which are mounted respective bearings (not shown) which serve to journal a rotatable axle 70
therein, as described in greater detail below. The transfer sleeve connects at its lower end to a
5 downwardly extending torque frame 72 in the form of a pair of tubular members 73, which in
turn is coupled to a spider\elelevator 74 which rotates with the torque frame. It will be apparent
that the torque frame may take many, such as a plurality of tubular members, a solid body, or any
other suitable structure.

The spider\elelevator 74 is preferably powered by a hydraulic or pneumatic system,
or alternatively by an electric drive motor or any other suitable powered system. In the
10 embodiment disclosed, the spider\elelevator includes a housing 75 which defines a central
passageway 76 through which the pipe segment 11 may pass. The spider\elelevator also includes
a pair of hydraulic or pneumatic cylinders 77 with displaceable piston rods 78 (FIGS. 5A and 5B)
which are connected through suitable pivotable linkages 79 to respective slips 80. The linkages
are pivotally connected to both the top ends of the piston rods and to the top ends of the slips.
15 The slips include generally planar front gripping surfaces 82, and specially contoured rear
surfaces 84 which are designed with such a contour to cause the slips to travel between respective
radially outwardly disposed, disengaged positions, and radially inwardly disposed, engaged
positions. The rear surfaces of the slips travel along respective downwardly and radially
inwardly projecting guiding members 86 which are complementarily contoured and securely
20 connected to the spider body. The guiding members cooperate with the cylinders and linkages
to cam the slips radially inwardly and force the slips into the respective engaged positions. Thus,
the cylinders (or other actuating means) may be empowered to drive the piston rods downwardly,
causing the corresponding linkages to be driven downwardly and therefore force the slips
downwardly. The surfaces of the guiding members are angled to force the slips radially inwardly
25 as they are driven downwardly to sandwich the pipe segment 11 between them, with the guiding
members maintaining the slips in tight engagement with the pipe segment. To release the pipe
segment 11, the cylinders 76 are operated in reverse to drive the piston rods upwardly, which
draws the linkages upwardly and retracts the respective slips back to their disengaged positions
to release the pipe segment. The guiding members are preferably formed with respective notches
30 81 which receive respective projecting portions 83 of the slips to lock the slips in the disengaged
position (FIG. 5A).

The spider\elelevator 74 further includes a pair of diametrically opposed, outwardly
projecting ears 88 formed with downwardly facing recesses 90 sized to receive correspondingly
formed, cylindrical members 92 at the bottom ends of the respective links 40, and thereby
35 securely connect the lower ends of the links to the spider\elelevator. The ears may be connected
to an annular sleeve 93 which is received over the housing 75, or may be formed integral with
the housing.

In one illustrative embodiment, the pipe running tool 10 includes a load compensator,

1 generally designated 94. The load compensator preferably is in the form of a pair of hydraulic,
double rodded cylinders 96, each of which includes a pair of piston rods 98 that are selectively
extendable from, and retractable into, the cylinder. The upper rods connect to a compensator
clamp 100, which in turn is connected to the lower drive shaft 14, while the lower rods extend
5 downwardly and connect at the respective lower ends to a pair of ears 102 which are securely
mounted to the bushing 60. The hydraulic cylinders may be actuated to draw the bushing
upwardly relative to the lower drive shaft 14 by applying a pressure to the cylinders which causes
the upper piston rods to retract into the respective cylinder bodies, with the splined interface
between the bushing and lower drive shaft allowing the bushing to be displaced vertically relative
10 to the shaft. In that manner, the pipe segment 11 carried by the spider\elelevator 74 may be raised
vertically to relieve a portion or all of the load applied to the pipe segment 11, as is described in
greater detail below. As is shown in FIG. 2, the lower rods are at least partially retracted,
resulting in the majority of the load from the pipe running tool 10 is assumed by the top drive
output shaft 28. In addition, when a load above a preselected maximum is applied to the pipe
15 segment 11, the cylinders 96 will automatically react the load to prevent the entire load from
being applied to the threads of the pipe segment.

The pipe running tool 10 still further includes a hoist mechanism, generally designated
104, for hoisting a pipe segment upwardly into the spider\elelevator 74. The hoist mechanism is
disposed off-axis and includes a pair of pulleys 106 carried by the axle 70, the axle being
20 journaled into the bearings in respective through passageways formed in the arms 64. The hoist
mechanism also includes a gear drive, generally designated 108, that may be selectively driven
by a hydraulic motor 111 or other suitable drive system to rotate the axle and thus the pulleys.
The hoist may also include a brake 115 to prevent rotation of the axle and therefore of the pulleys
and lock them in place, as well as a torque hub 116. Therefore, a pair of chains, cables, or other
25 suitable, flexible means may be run over the respective pulleys, extended through a chain well
113, and engaged to the pipe segment 11, and the axle is then rotated by a suitable drive system
to hoist the pipe segment vertically and up into position with the upper end of the pipe segment
11 extending into the spider\elelevator 74.

The pipe running tool 10 preferably further includes an annular collar 109 which is
30 received over the links 40 and which maintains the links locked to the ears 88 and prevents the
links from twisting and/or winding.

In use, a work crew may manipulate the pipe running tool 10 until the upper end of the
tool is aligned with the lower end of the top drive output shaft 28. The pipe running tool 10 is
then raised vertically until the splined coupler 52 at the lower end of the top drive output shaft
35 is engaged to the upper end of the lower drive shaft 14 and the links 40 are engaged with the ears
93. The work crew may then run a pair of chains or cables over the respective pulleys 106 of the
hoist mechanism 104, connect the chains or cables to a pipe segment 11, engage a suitable drive
system to the gear 108, and actuate the drive system to rotate the pulleys and thereby hoist the

1 pipe segment upwardly until the upper end of the pipe segment extends through the lower end
of the spider\elelevator 74. The spider\elelevator is then actuated, with the hydraulic cylinders 77
and guiding members 86 cooperating to forcibly drive the respective slips 84 into the engaged
5 positions (FIG. 5B) to positively engage the pipe segment. The slips are preferably advanced to
a sufficient extent to prevent relative rotation between the pipe segment and the spider\elelevator,
such that rotation of the spider\elelevator translates into rotation of the pipe segment.

The top drive assembly 24 is then lowered relative to the frame 20 by means of the top
hoist 25 to drive the threaded lower end of the pipe segment 11 into contact with the threaded
upper end of the pipe string 34 (FIG. 1). As shown in FIG. 1, the pipe string is securely held in
10 place by means of the flush-mounted spider 36 or any other suitable structure for securing the
string in place, as is well known to those skilled in the art. Once the threads are properly mated,
the top drive motor 26 is then actuated to rotate the top drive output shaft, which in turn rotates
the lower drive shaft of the pipe running tool 10 and the spider\elelevator 74, which causes the
coupled pipe segment to rotate and thereby be threadedly engaged to the pipe string.

15 In one embodiment, the pipe segment 11 is intentionally lowered until the lower end of
the pipe segment rests on the top of the pipe string 34. The load compensator 94 is then actuated
to drive the bushing 60 upwardly relative to the lower drive shaft 14 via the splined interface
between the two. The upward movement of the bushing causes the spider\elelevator 74 and
therefore the coupled pipe segment 11 to be raised, thereby reducing the weight on the threads
20 of the pipe segment. In this manner, the load on the threads can be controlled by actuating the
load compensator.

Once the pipe segment 11 is threadedly coupled to the pipe string, the top drive assembly
24 is raised vertically to lift the entire pipe string 34, which causes the flush-mounted spider 36
to disengage the string. The top drive assembly 24 is then lowered to advance the string
25 downwardly into the well hole until the upper end of the top pipe segment 11 is close to the drill
floor 30, with the entire load of the pipe string being carried by the links 40 while the torque was
supplied through shafts. The flush-mounted spider 36 is then actuated to engage the pipe string
and suspend it therefrom. The spider\elelevator 74 is then controlled in reverse to retract the slips
84 back to the respective disengaged positions (FIG. 5A) to release the pipe string. The top drive
30 assembly 24 is then raised to lift the pipe running tool 10 up to a starting position (such as that
shown in FIG. 1) and the process may be repeated with an additional pipe segment 11.

Referring to FIG. 6, there is shown a block diagram of components included in one
illustrative embodiment of the pipe running tool 10. In this embodiment, the tool includes a
conventional load cell 110 or other suitable load-measuring device mounted on the pipe running
35 tool 10 in such a manner that it is in communication with the lower drive shaft 14 to determine
the load applied to the lower end of the pipe segment 11. The load cell is operative to generate
a signal representing the load sensed, which in one illustrative embodiment is transmitted to a
processor 112. The processor is programmed with a predetermined threshold load value, and

1 compares the signal from the load cell with that value. If the load exceeds the value, the
processor then controls the load compensator 94 to draw upwardly a selected amount to relieve
at least a portion of the load on the threads of the pipe segment. Once the load is at or below the
threshold value, the processor controls the top drive assembly 24 to rotate the pipe segment 11
5 and thereby threadedly engage the pipe segment to the pipe string 34. While the top drive
assembly is actuated, the processor continues to monitor the signals from the load cell to ensure
that the load on the pipe segment does not exceed the threshold value.

Alternatively, the load on the pipe segment 11 may be controlled manually, with the load
cell 110 indicating the load on the pipe segment via a suitable gauge or other display, with a work
10 person controlling the load compensator 94 and top drive assembly 24 accordingly.

Referring to FIG. 7, there is shown another preferred embodiment of the pipe running tool
200 of the present invention. The pipe running tool includes a hoisting mechanism 202 which
is substantially the same as the hoisting mechanism 104 described above. A lower drive shaft
204 is provided and connects at its lower end to a conventional mud-filling device 206 which,
15 as is known in the art, is used to fill a pipe segment, for example, a casing segment, with mud
during the assembly process. In one illustrative embodiment, the mud-filling device is a device
manufactured by Davies-Lynch Inc. of Texas.

The hoisting mechanism 202 supports a pair of chains 208 which engage a slip-type single
joint elevator 210 at the lower end of the pipe running tool 200. As is known in the art, the single
20 joint elevator is operative to releasably engage a pipe segment 11, with the hoisting mechanism
202 being operative to raise the single joint elevator and pipe segment upwardly and into the
spider\elelevator 74.

The tool 200 includes the links 40 which define the cylindrical lower ends 92 which are
received in generally J-shaped cut-outs 212 formed in diametrically opposite sides of the
25 spider\elelevator 74.

From the foregoing, it will be apparent that the pipe running tool 10 efficiently utilizes an
existing top drive assembly to assemble a pipe string, for example, a casing or drill string, and
does not rely on cumbersome casing tongs and other conventional devices. The pipe running tool
incorporates the spider\elelevator 74, which not only carries pipe segments, but also imparts
30 rotation to them to threadedly engage the pipe segments to an existing pipe string. Thus, the pipe
running tool provides a device which grips and torques the pipe segment 11, and which also is
capable of supporting the entire load of the pipe string as it is lowered down into the well hole.

While several forms of the present invention have been illustrated and described, it will
be apparent to those of ordinary skill in the art that various modifications and improvements can
35 be made without departing from the spirit and scope of the invention. Accordingly, it is not
intended that the invention be limited, except as by the appended claims.

1 WHAT IS CLAIMED IS:

1. A pipe running tool mountable on a rig for use in handling pipe segments and for engaging the pipe segments to a string of pipe, the pipe running tool comprising:
a top drive assembly adapted to be connected to the rig for vertical displacement
5 of the top drive assembly relative to the rig, the top drive assembly including a drive shaft, the top drive assembly being operative to rotate the drive shaft; and
a lower pipe engagement assembly including a central passageway sized for receipt of the pipe segment, the lower pipe engagement assembly including a powered pipe engaging mechanism that is selectively driven into a pipe engagement position to forcibly yet releasably
10 engage the pipe segment and substantially prevent relative rotation therebetween, the lower pipe engagement assembly being in communication with the drive shaft, whereby actuation of the top drive assembly causes the lower pipe engagement assembly to rotate.
2. The pipe running tool of claim 1, further including a hoist mechanism connected
15 to the lower pipe engagement assembly and operative to hoist a pipe segment into the central passageway of the lower pipe engagement assembly.
3. The pipe running tool of claim 2, wherein the hoist mechanism comprises an axle journaled to the lower pipe engagement member, a pair of pulleys rotatably mounted to the axle,
20 and a gear connected to the axle, whereby the gear may be coupled to a drive system for rotating the axle.
4. The pipe running tool of claim 1, wherein the lower pipe engagement assembly comprises a spider/elevator.
25
5. The pipe running tool of claim 1, wherein the lower pipe engagement assembly is powered by one of a hydraulic system and a pneumatic system.
6. The pipe running tool of claim 5, wherein the lower pipe engagement assembly
30 comprises a generally cylindrical housing defining a central passageway, and a plurality of slips disposed within the bowl and displaceable radially inwardly to engage a casing segment extending through the opening.
7. The pipe running tool of claim 1, further including a block connected to the top
35 drive assembly and adapted for engaging a plurality of cables connected to the rig.
8. The pipe running tool of claim 7, wherein the drive members comprise hydraulic lift cylinders.

1 9. A pipe running tool mountable on a rig and designed for use in handling pipe
segments and for engaging pipe segments to a pipe string, the pipe running tool comprising:
 a top drive assembly adapted to be connected to the rig, the top drive assembly
including a top drive output shaft, the top drive assembly being operative to rotate the drive shaft;
5 a lower drive shaft coupled to the top drive output shaft and comprising an
adjustable segment that is selectively adjustable to adjust the length of the second drive shaft;
 a lower pipe engagement assembly including a central passageway sized for receipt
of the pipe segment, the lower pipe engagement assembly being operative to releasably grasp the
pipe segment, the lower pipe engagement assembly being connected to the second drive shaft,
10 whereby actuation of the top drive assembly causes the lower pipe engagement assembly to
rotate; and
 means for applying a force to the second shaft to cause the length of the adjustable
segment to be shortened.

15 10. The pipe running tool of claim 9, wherein the means for applying comprises a load
compensator in the form of a pair of hydraulic cylinders.

 11. The pipe running tool of claim 9, wherein the lower pipe engagement assembly is
actuated by one of a hydraulic system and a pneumatic system.

20 12. The pipe running tool of claim 9, wherein the lower pipe engagement assembly
comprises a generally cylindrical housing defining a central passage, and a plurality of slips
disposed within the housing and displaceable radially inwardly to engage a casing segment
extending through the passage.

25 13. The pipe running tool of claim 9, further including a block connected to the top
drive assembly and adapted for engaging a plurality of cables connected to the rig to selectively
raise and lower the top drive assembly.

30 14. A pipe running tool mountable on a rig and designed for use in connection with a
top drive assembly adapted to be connected to the rig for vertical displacement of the top drive
assembly relative to the rig, the top drive assembly including a drive shaft, the top drive assembly
being operative to rotate the drive shaft, the pipe running tool comprising:

 a lower pipe engagement assembly comprising:
35 a housing defining a central passageway sized for receipt of a pipe segment, the
housing being coupled to the top drive assembly for rotation therewith;
 a plurality of slips disposed within the housing and displaceable between
disengaged and engaged positions; and

1 a powered system connected to the respective slips and operative to selectively
drive the slips between the disengaged and engaged positions.

5 15. The pipe running tool of claim 14, further including a hoist mechanism connected
to the lower pipe engagement assembly and operative to hoist a pipe segment into the central
passageway of the lower pipe engagement assembly.

10 16. The pipe running tool of claim 15, wherein the hoist mechanism comprises an axle
journaled to the lower pipe engagement member, a pair of pulleys rotatably mounted to the axle,
and a gear connected to the axle, whereby the gear may be coupled to a drive system for rotating
the axle.

15 17. The pipe running tool of claim 14, wherein the powered system comprises one of
a hydraulic and pneumatic system.

18. The pipe running tool of claim 14, further including a block connected to the top
drive assembly and adapted for engaging a plurality of cables connected to the rig.

20 19. In a system for assembling a pipe string comprising a top drive assembly, a lower
pipe engagement assembly coupled to the top drive assembly for rotation therewith and operative
to releasably engage a pipe segment, and a load compensator operative to raise the lower pipe
engagement assembly relative to the top drive assembly, a method for threadedly engaging a pipe
segment with a pipe string, comprising the steps of:

25 actuating the lower pipe engagement assembly to releasably engage a pipe segment;
lowering the top drive assembly to bring the pipe segment into contact with the pipe
string;

monitoring the load on the pipe string;
actuating the load compensator to raise the pipe segment a selected distance relative
to the pipe string, if the load on the pipe string exceeds a predetermined threshold value; and

30 actuating the top drive assembly to rotate the pipe segment to threadedly engage
the pipe segment and pipe string.

35

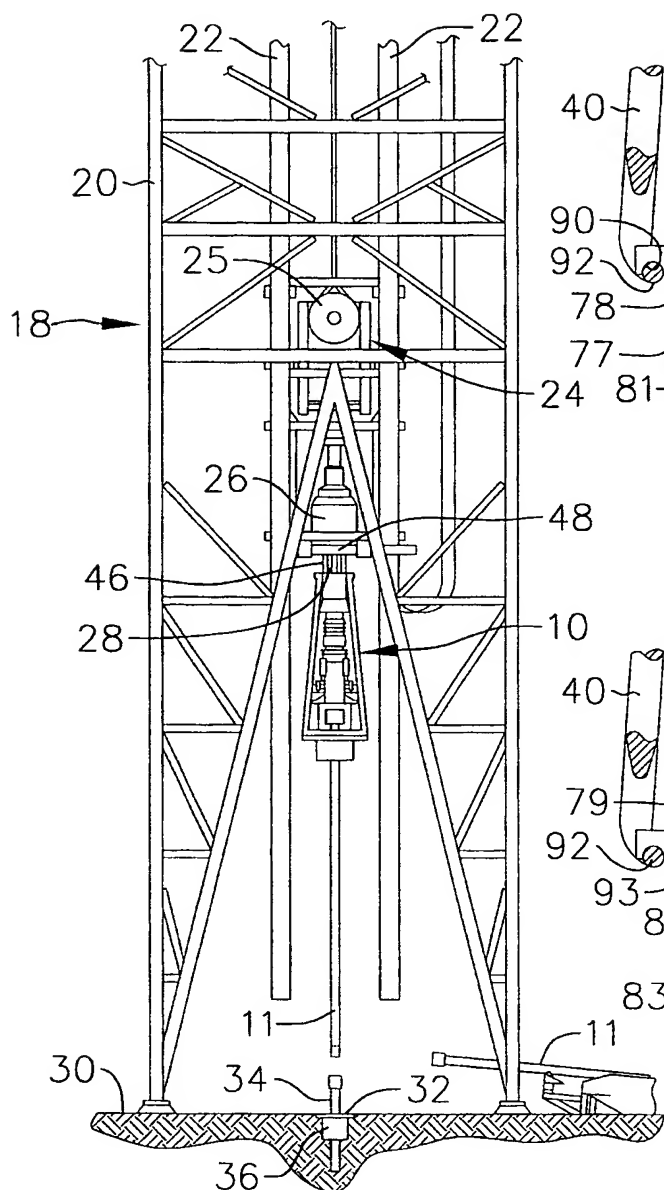
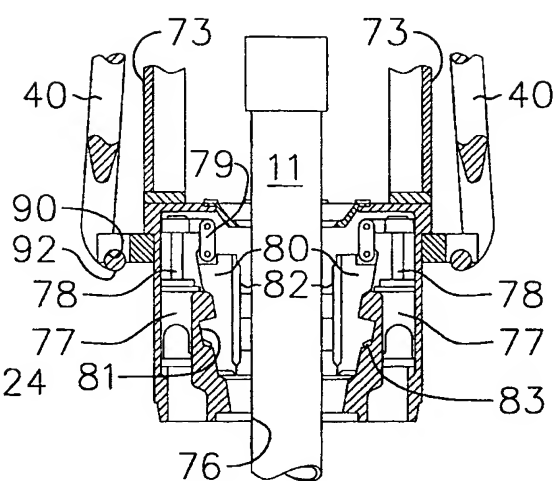
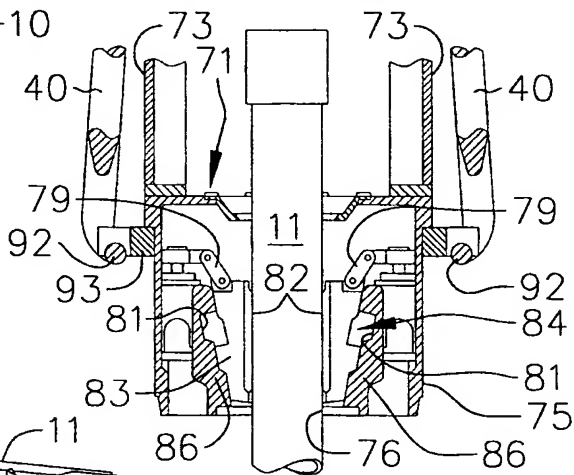
FIG. 1**FIG. 5A****FIG. 5B**

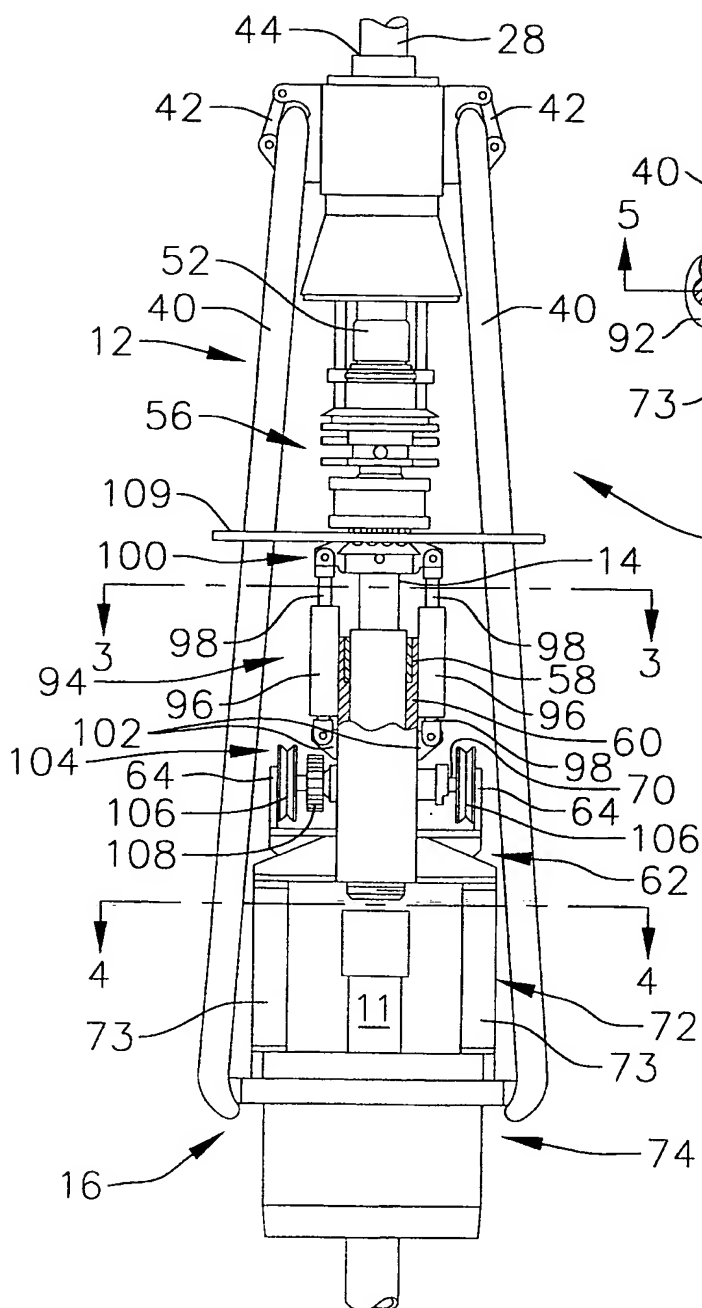
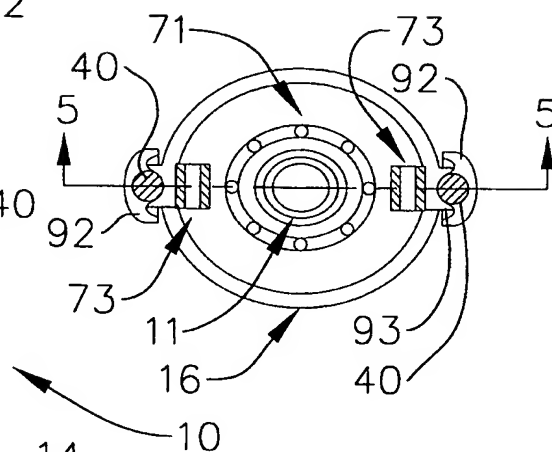
FIG. 2*FIG. 4*

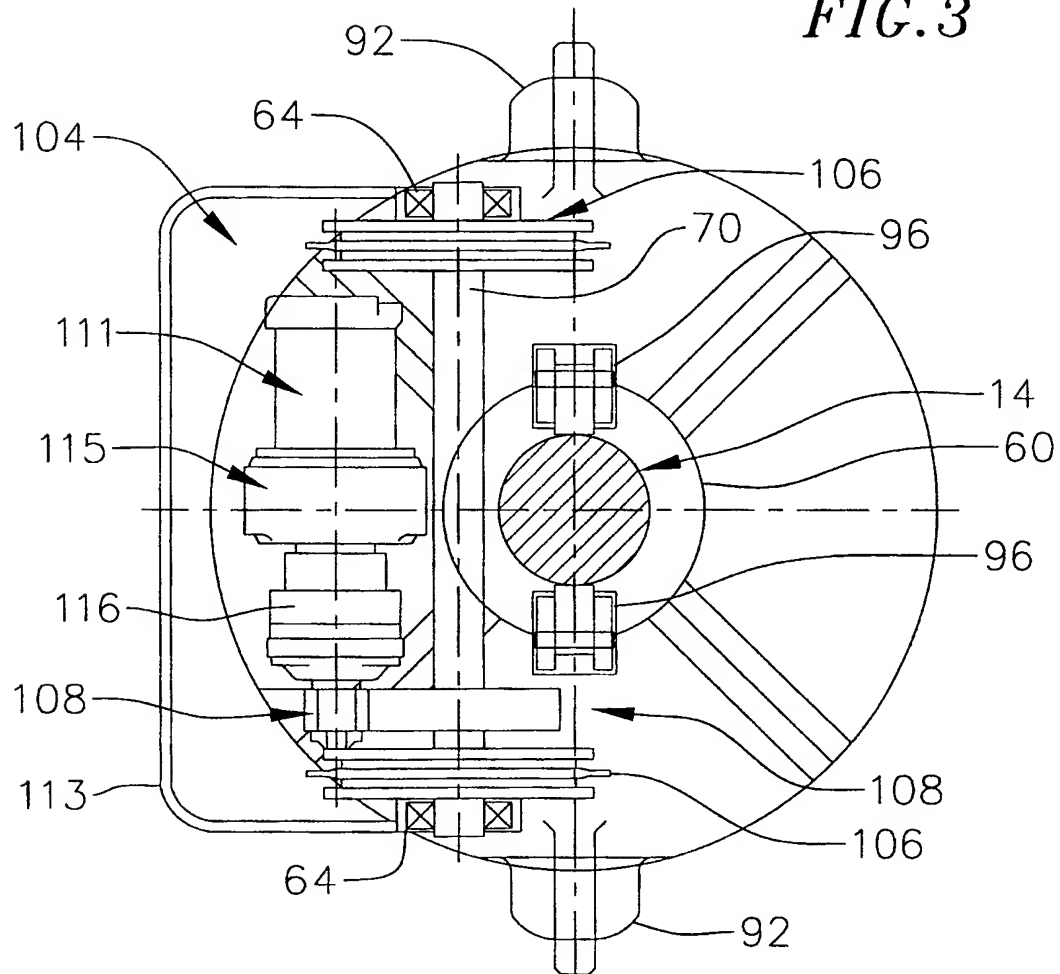
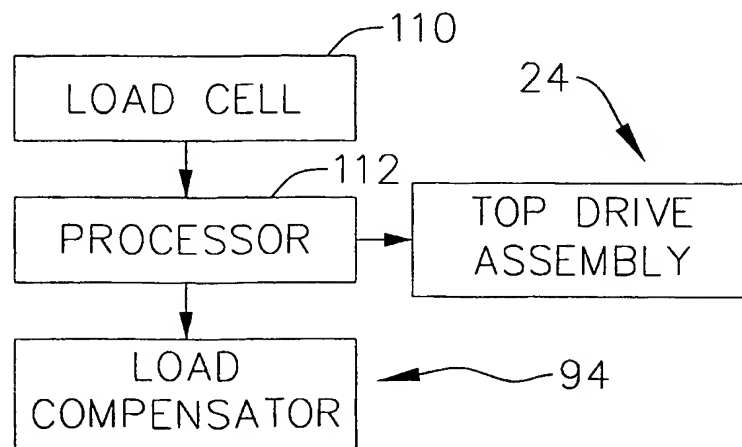
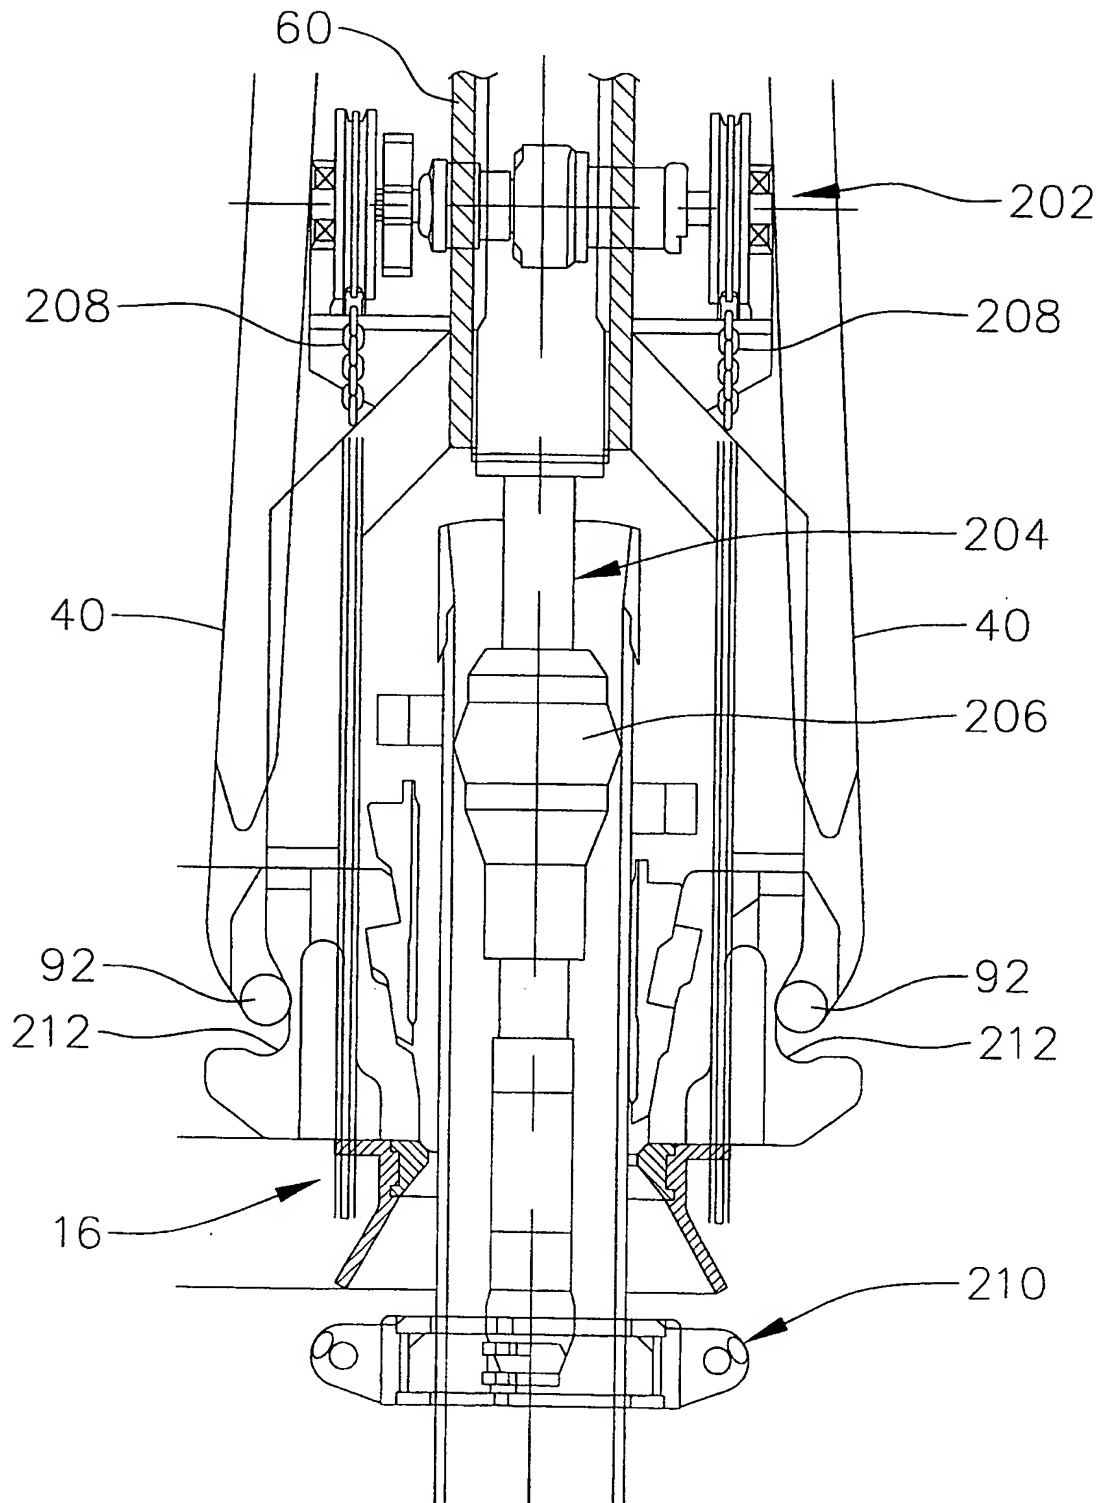
FIG. 3*FIG. 6*

FIG. 7



THIS PAGE BLANK (USPTO)